
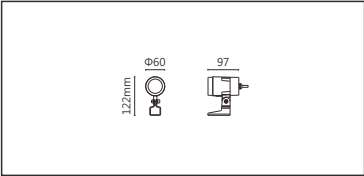


SA-H220-DXA-1



Features & Application 产品特点&适用场所

- 小型圆形投光灯，适用于投射柱子、窄墙、屋檐、树干的照明
- 多种光学配件可选，从远距离聚焦照明到泛光照明，满足不同场所投光需求
- 简易安装结构，施工方便，确保灯具安全稳固
- 对流散热通道设计，具有良好的散热性能，可确保LED光源的寿命
- 可选配遮光罩，进一步提升灯具的防眩效果
- 高灰阶，亮度调节变化细腻丝滑，可达16K的刷新率，手机摄录无频闪，人眼观测无疲劳

适用于公园景观亮化、户外大楼、桥梁、古建筑泛光投射照明、文旅照明、别墅庭院景观亮化等

Options 可选

色温 (Color Temperature) : 2700K、3000K、3500K、4000K、5000K


功率 (Power) : 7W

光束角 (Beam Angle) : 3°







Product specifications 产品规格

输入电参数 (Input)	DC24V		安规执行标准 (Standards of Safety)	IEC60598-1:2020/GB 7000.1-2015 IEC60598-2-5:2015/GB 7000.7-2005
光源 (Light Source)	CREE XP-P		存储条件 (Storage Condition)	温度 (Temperature) : -40℃ ~ 50℃ 湿度 (Humidity) : 10% ~ 95%RH
显色性 (Color Rendering)	Ra≥80		线材/长度/连接器 (Connecting)	1.0mm²*2+0.3mm²*3 可选配防水接头 (Optional waterproof connector available) 50~55cm
LED数量 (Number of LEDs)	1			
光通量 (Luminous Flux)	285 lm@2700K	295 lm@3000K	产品主体材质 (Material)	高强度、高导热性铝合金 (High-strength, high thermal conductivity aluminum alloy)
	300 lm@3500K	315 lm@4000K		
	340 lm@5000K			
光效 (Luminous Efficacy)	41 lm/W@2700K	42 lm/W@3000K	安装方式 (Installation)	表面安装 (Surface Installation) 旋转底座 (RotaryBase) 地插安装 (Ground Installation) 抱箍安装 (Hoop Installation) 喉箍安装 (Hose Clamp Installation)
	43 lm/W@3500K	45 lm/W@4000K		
	48 lm/W@5000K			
截光角 (Cut-off Angle)	15° 25° (5mm蜂窝网Honeycomb network) 40° (3mm蜂窝网Honeycomb network)		产品净量 (Net Weight)	≤0.7kg
控制方式 (Control Method)	DMX		安定器/变压器/驱动器 (Ballast/Transformer/Driver)	/
灰阶 (Gray Scale)	65536			

Finishing 灯具颜色

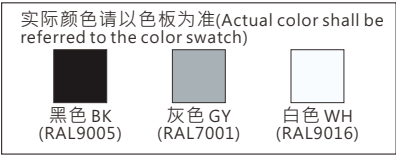


Accessories 配件


配件	配件型号	图片	尺寸图	配件	配件型号	图片	尺寸图
遮光罩 (Shade hood)	AC-SAH220-D01			旋转支架 (Rotating bracket)	AC-SAH320A-R01		
	AC-SAH220-D02				AC-SAH320A-R02		
蜂窝网 (Honeycomb network)	AC-SAH220A-H01	 截光角40°		旋转底座 (Rotary base)	AC-SAH320A-F01		
	AC-SAH220A-H02	 截光角25°		插泥件 (Mud insert)	AC-SAH320A-F02		
拉伸膜片 (Stretch film)	AC-C38E0140 AC-C38E0160 AC-C38E1060 AC-C38E1560 AC-C38E3060			抱箍底座 (Hope base)	AC-SAH320A-F03		
				喉箍底座 (Hose clamp base)	AC-SAH320A-F04	 喉箍需自行购买 (Hose clamps need to be purchased separately)	

Light Distribution 配光曲线图


2700K 285 lm




3000K 295 lm



3500K 300 lm



4000K 315 lm



5000K 340 lm

